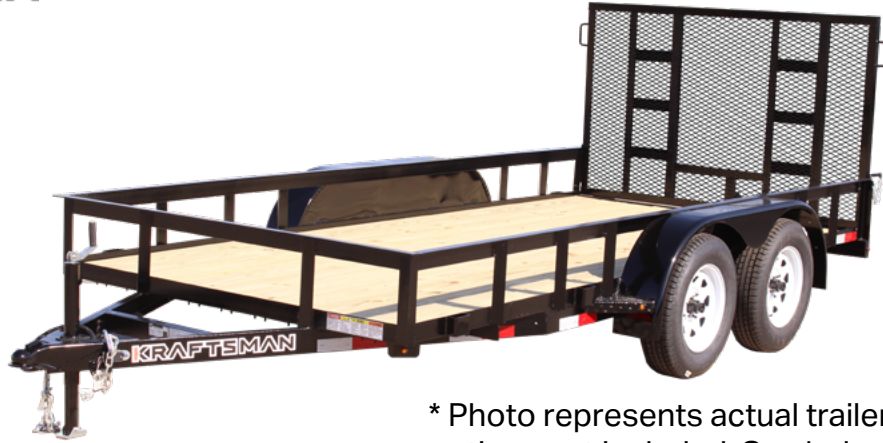


**KRAFTSMAN**

\* Photo represents actual trailer, may show options not included. See below for full specs.

## TANDEM LOWSIDE UTILITY TRAILER

### STANDARD FEATURES

#### Construction

- 3" x 2" Angle Top Rail and Main Frame
- 4" Channel Tongue with Wrapper
- 3" x 2" Angle Crosspieces on 24" Centers
- Fully Enclosed 4" x 2" Tubular Tailboard

#### Undercarriage

- 2 x 3,500 lb. EZ-Lube Axles
- 10" x 2" Brakes on Rear Axle
- Double Eye Spring Suspension
- 5 on 4.5" Bolt Pattern
- 4 x 205/75 R15 Radial Tires

#### Additional Features

- Nominal 2" Pressure Treated #1 Pine Deck
- Bolt-On 2,000 lb. Tongue Jack
- Fixed 2 5/16" Coupler
- Stake Pockets Between Each Upright
- 9" x 72" Smooth Steel Fenders

#### Electrical

- Rubber Mounted, DOT Approved Lights
- Marker Light on Formed Steps and Corners
- Factory Built Wiring Harness
- 7-Way RV-Style Plug

#### Dimensions

- 7,000 GVWR, 5,500 lb. Capacity
- 16' Flat Deck Standard
- 48" Mesh Tailgate, Fixed, w/ Spring Assist
- 18" Approx. Deck Height
- 3' Tongue, 4" Channel Construction

#### Finish

- High Pressure Phosphate Wash
- Primed Top & Bottom w/ Automotive Primer
- Two Top Coats of 2-Part PPG Black Gloss
- DOT Reflective Tape, Kraftsman Decals
- Safety & Operational Decals

Model	Size	Est. Tare
L3-S	76" x 16'	1,650 lb.

Standard features and parts sourcing are subject to change with no notice and no price change to the trailer, including after build agreement. All components used in construction of the trailer are guaranteed to support listed ratings.